- 6-1/2" HOP Woofer Cone
- Balanced Drive Midrange
- Dome Tweeter
- New Xplōd® design
- 200W max input power (50W RMS)
- Flexible mounting options
- 4Ω Voice Coil

- Indicates step-up

XS-V1632
3-Way Speaker

Specifications

Speaker	Coaxial 3-way: Woofer 15.8 cm (6 1/4 in.) cone type Midrange 3.5 cm (1 7/16 in.) balance dome type Tweeter 1.1 cm (7/16 in.) dome type
Maximum input power	200 watts
Rated input power	50 watts
Impedance	4 ohms
Sensitivity	90 dB/W/m
Frequency response	30-25,000 Hz
Mass	Approx. 715g (1 lb. 9 oz.) per speaker

Parts

Part No.	Description
1-825-063-11	SPEAKER (16cm) (L)
1-825-063-21	SPEAKER (16cm) (R)
3-240-114-11	MANUAL, INSTRUCTION (ENGLISH, FRENCH, SPANISH, TRADITIONAL CHINESE)
3-240-639-01	PLATE, TOP
X-3381-853-1	NET ASSY, GRILLE (x2)
1-574-318-71	CORD (WITH TERMINAL) (L) (WHITE)
1-574-318-81	CORD (WITH TERMINAL) (R) (GRAY)
3-240-189-01	SCREW (+P4 X 35), SPECIAL (x8)
3-392-870-01	NUT, SPEED (x8)

Design and Specifications subject to change without notice.

SONY®

XS-V1632
3-Way Speaker

Dimensions

Unit: mm (in.)

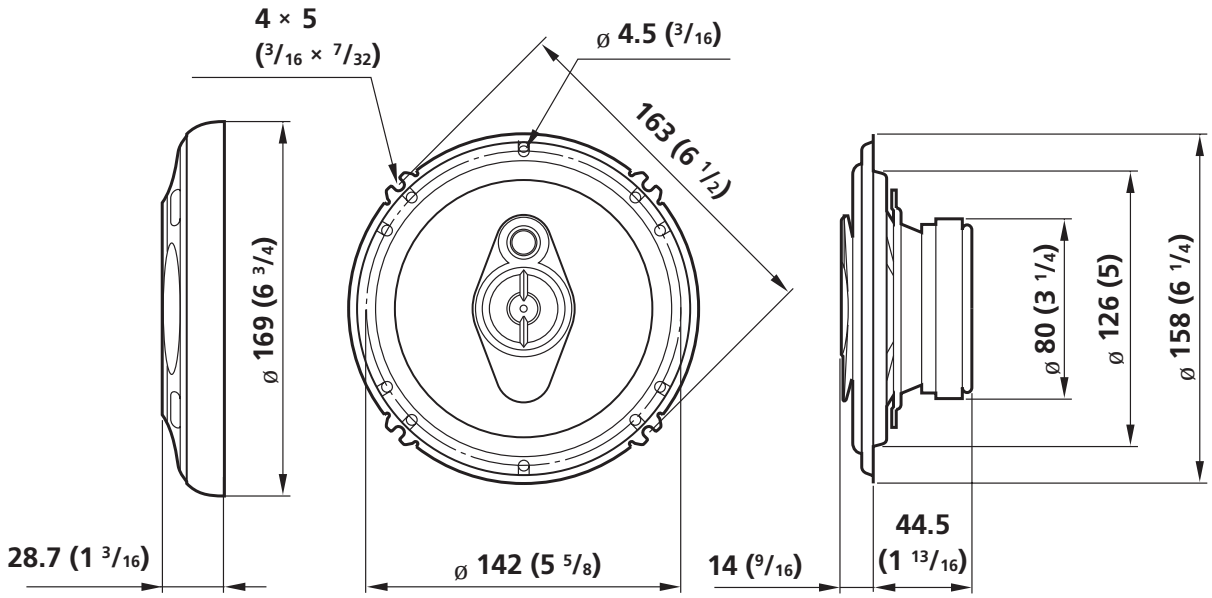

Design and Specifications subject to change without notice.

SONY